

ACOUSTIC HOOD



MAIN FEATURES

series Acoustic Hood, molded from glass fiber reinforced plastics (SMC), combines aesthetic appeal with exceptional durability to withstand noise, impact, freezing temperatures, corrosion, high heat, and flames. It is ideal for high-noise environments, including high-noise environments including ships, offshore platforms, power plants, substations, and petrochemical facilities with up to 25dB noise reduction.

- Suitable for indoor/outdoor use, waterproof, dustproof, and UV-resistant
- SMC construction for high strength and impact resistance
- 3mm white perforated polypropylene acoustic lining
- Interior of the booth is equipped with a SUS304 mounting backplate (max load is 30kg,the holes on the backplate can be reserved upon request)
- Wall-mounted via two SUS304 mounting brackets
- Available colors: yellow, orange, red, or blue (other colors/dimensions upon request)















SPECIFICATIONS


Shell Material	SMC fiberglass enclosure with automotive-grade outdoor paint finish
Acoustic Layer	3mm white perforated polypropylene lining (≈25dB noise reduction)
Back Panel Material	SUS304
Mounting Brackets Material	SUS304
Dimensions	850 x 680 x 500mm (H × W × D)
Net Weight	31kg
Packaging Size	980 x 800 x 680mm (H × W × D)
Gross Weight	58kg, wooden case

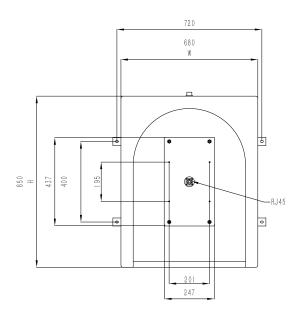

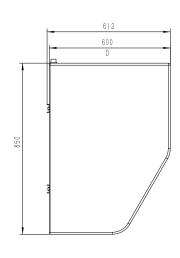

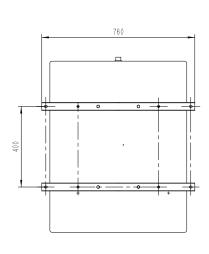

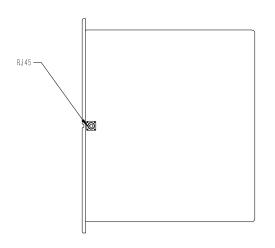

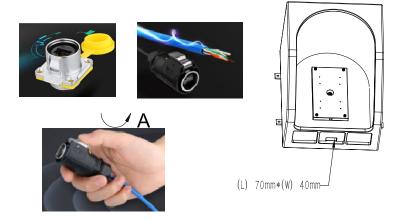

Tel: +86 - 755 - 27322952

Web: www.jrteck.com

